


HOOK-ON SYSTEM

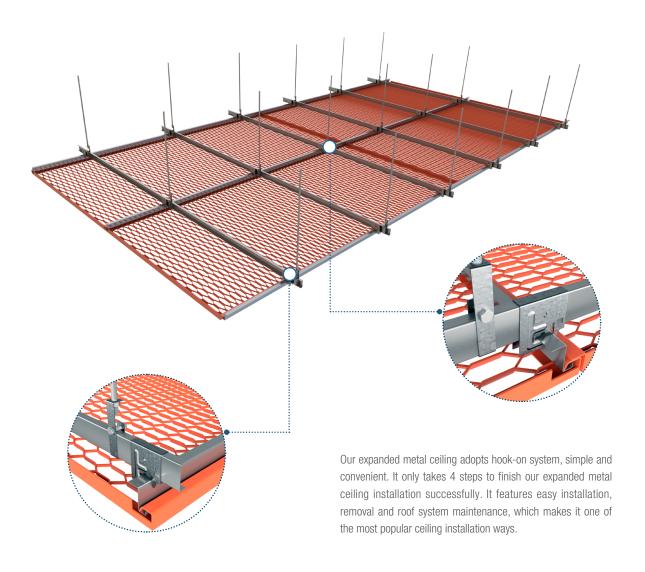

Step 1

Fix the light steel main channel.

Expansion bolts and main carrier fittings are used to hang the light steel main carrier under the roof.

Step 2

Adjust the main carrier plane.

Make all main carriers in the same horizontal plane by moving the expansion bolt up and down.

Step 3

Connect main carriers and cross carriers.

Cross connector clamps are used to connect cross carriers to main carriers.

Step 4

Install hook-on expanded metal ceiling panels.

Hook the hook-on expanded metal ceiling panels onto the carrier system and the ceiling installation is finished.

